



PCS615

Self Amplified Wall Mount Speaker System

12407 Mukilteo Speedway, Ste. 130,
Lynnwood, WA 98087
Phone: (800) 438-4026
Fax: (877) 721-6107
info@amkspeakers.com
www.amkspeakers.com



The AMK PCS615 is a self amplified cabinet speaker system. It features a 15 watt Class D digital design amplifier, with > 75% efficiency and one of AMK's world class coaxial drivers. The CX602 speaker, a full range, low distortion, transducer is one of only a few that, though designed for overhead applications in the commercial sound industry, produces audio quality that is equally at home in the demanding world of extended sound fields and recording studios as well.

Excellent dispersion, wide bandwidth, and a smooth frequency response make this the top choice for cabinet as well as overhead commercial applications.



There are wide ranges of applications of this unit including extending the sound field to where ceiling speakers are not appropriate or desired. These applications also include educational markets and corporate boardrooms where direct input of the signal from a is desired i.e. projector or mobile audio source.

Transducer Specifications	
Frequency Response	65 Hz - 20 kHz
Voice-coil diameter	1"
Average Beamwidth @ 2 kHz	144 deg.
Magnet Weight	13 oz
Magnet Material	Barium Ferrite
Tweeter	13mm Polyamide Soft Dome
Woofer Cone	Polypropylene
Surround Material	Inverted Rubber
Crossover Frequency	6.3 kHz

Enclosure Specifications	
(Enclosure listed under UL 94)	
Enclosure	Acrylonitrile Butadiene Styrene (ABS)
Height	12"
Width	9"
Depth	7"
Bracket	Metal U bracket with screw knob on the side and electro welded insert for omni mount on rear plane.
Grille	Perforated Metal

Amplifier Specifications	
Amplification	15 watt Class D design amplifier
Amplifier Efficiency	> 75%
Total Harmonic Distortion	< 0.2%
Signal to Noise Ratio	>95dB
Protection	Short circuit to supply and ground, as well as under current
Controls	Input potentiometer level adjustment


FEATURES
<ul style="list-style-type: none"> * Plastic Enclosure Type with perforated metal grill * High performance 6½" coaxial loudspeaker with wide dispersion * Very high performance 15 watt digital amplifier * Wide choice of input and control configurations
<p>Speaker ships with U bracket, omni directional bracket is available at nominal amount.</p>

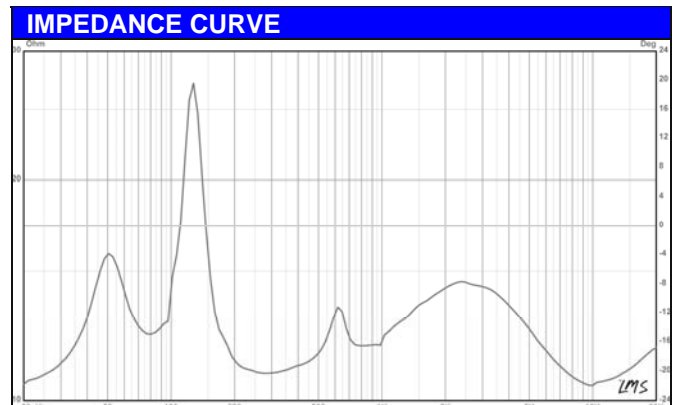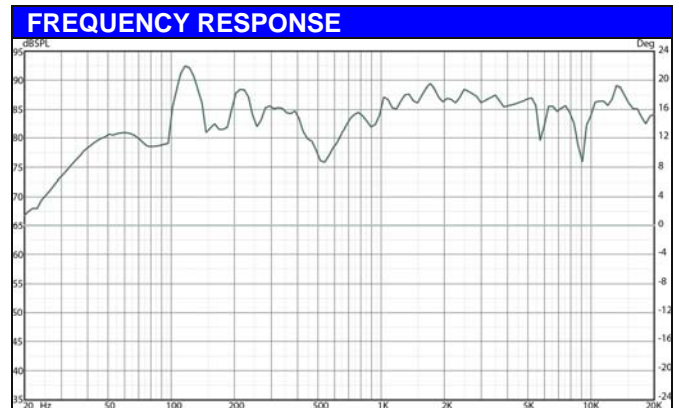

MODEL OPTION CONFIGURATIONS


PCS615-SM

Stereo to Mono unbalanced

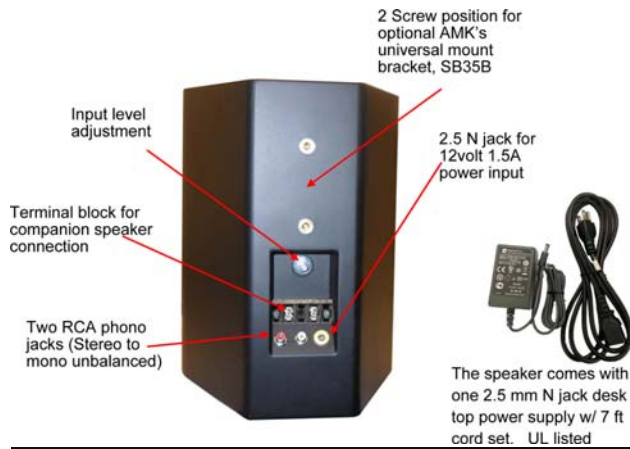


PCS615-OM

One unbalanced input

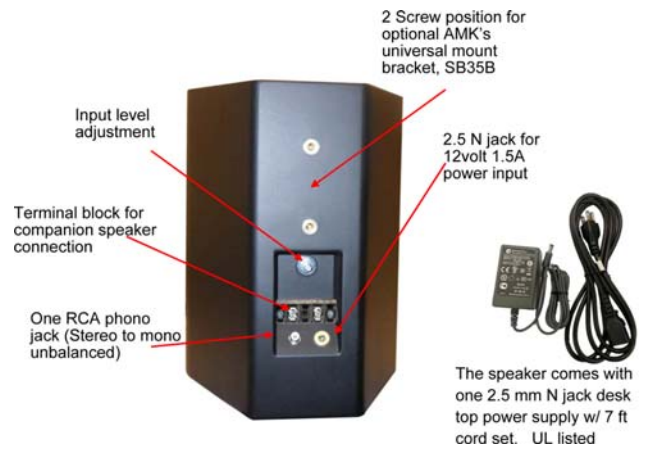

PCS615-RPS

Stereo to Mono unbalanced

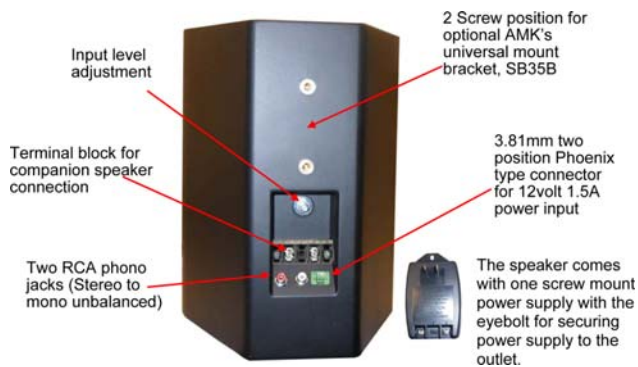

PCS615-RPM

One unbalanced input



PCS615-EPS

Stereo to Mono unbalanced




PCS615-EPM

One unbalanced input



MODEL OPTION CONFIGURATIONS


PCS615-JFS Stereo to Mono unbalanced

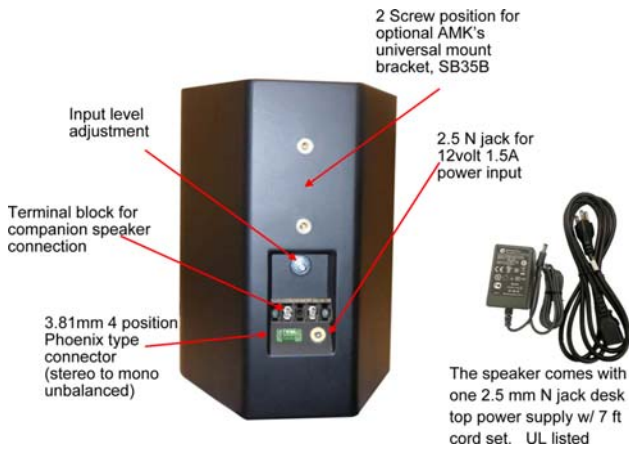


PCS615-JFM One balanced input



PCS615- CFS Stereo to Mono unbalanced

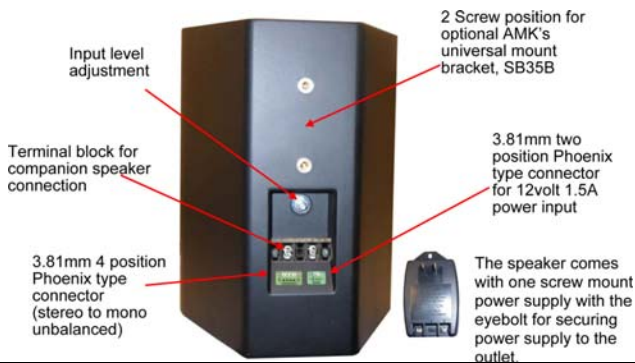

PCS615- CFM One balanced input

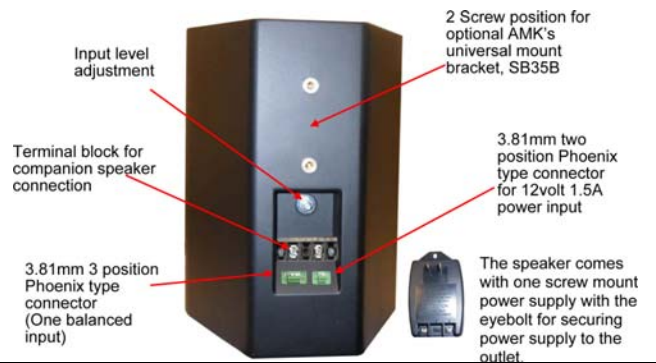

PCS615- EFS Stereo to Mono unbalanced



PCS615- EFM One balanced input



MODEL OPTIONS

Model	Power Supply	Power Connection	Input Connection	Signal Input	Slave input/output connections
PCS615-SM	External 12Volt	2.5mm N jack	Two RCA phono jacks	Stereo to Mono unbalanced	Screw terminal block connectors
PCS615-OM	External 12Volt	2.5mm N jack	One RCA phono jack	One unbalanced Input	Screw terminal block connectors
PCS615-RPS	External 12Volt w/ Screw Terminal	3.81mm two position Phoenix type connector	Two RCA phono jacks	Stereo to Mono unbalanced	Screw terminal block connectors
PCS615-RPM	External 12Volt w/ Screw Terminal	3.81mm two position Phoenix type connector	One RCA phono jack	One unbalanced Input	Screw terminal block connectors
PCS615-EPS	12 Volt for external higher amperage multi unit supply (User option for power source)	3.81mm two position Phoenix type connector	Two RCA phono jacks	Stereo to Mono unbalanced	Screw terminal block connectors
PCS615-EPM	12 Volt for external higher amperage multi unit supply (User option for power source)	3.81mm two position Phoenix type connector	One RCA phono jack	One unbalanced Input	Screw terminal block connectors
PCS615-JFS	External 12Volt	2.5mm N jack	3.81mm four position Phoenix type connector	Stereo to Mono unbalanced	Screw terminal block connectors
PCS615-JFM	External 12Volt	2.5mm N jack	3.81mm three position Phoenix type connector	One balanced Input	Screw terminal block connectors
PCS615-CFS	External 12Volt w/ Screw Terminal	3.81mm two position Phoenix type connector	3.81mm four position Phoenix type connector	Stereo to Mono unbalanced	Screw terminal block connectors
PCS615-CFM	External 12Volt w/ Screw Terminal	3.81mm two position Phoenix type connector	3.81mm three position Phoenix type connector	One balanced Input	Screw terminal block connectors
PCS615-EFS	12 Volt for external higher amperage multi unit supply (User option for power source)	3.81mm two position Phoenix type connector	3.81mm three position Phoenix type connector	One balanced Input	Screw terminal block connectors
PCS615-EFM	12 Volt for external higher amperage multi unit supply (User option for power source)	3.81mm two position Phoenix type connector	3.81mm three position Phoenix type connector	One balanced Input	Screw terminal block connectors

Architect's & Engineer's Specifications

The powered loudspeaker system shall be **AMK PCS615(-_____)**. The speaker shall feature a 15watt Class D design amplifier, with >75% efficiency within the speaker. The speaker driver assembly in the system shall be of the coaxial type with an 6.5" woofer of polypropylene, an inverted rubber surround, and a 1" polyamide soft dome, post mounted, tweeter.

The transducer in the loudspeaker system shall be AMK CX 602 coaxial loudspeaker. The woofer shall have a 13 oz. (369g) Barium Ferrite magnet. The two reproducer sections shall be coupled through a built-in capacitor bypass crossover. The crossover frequency shall be at 5.0 kHz. The low frequency reproducer shall have 1" (25.4mm) voice coil and the high frequency reproducer shall have 0.51" (13mm) voice coil.

The system shall have a frequency response of 65 Hz- 20 kHz (+/- 5dB). The power handling shall be 25watts at 8 ohm impedance. The sensitivity shall be 91dB at 1watt / 1meter.

The enclosure shall be constructed of high-impact ABS. The grille shall be completely powder coated for resistance against rusting, shall be bake-painted black.

The installation shall be done with U bracket provided with the cabinet with plastic knob screw on the side of the cabinet. Optional AMK SB-35 multi directional bracket may be used for installation as well.

The total weight of the unit system shall not exceed 7.0 lbs.

The loudspeaker system shall be AMK Innovations model **PCS615(-_____)**.

Conforms to EIA Standards: RS-276-A, RS-278-B, RS-426-A